


A-2YF(L)2Y...St III Bd

Underground cable, screened, longitudinal watertight
Standard: DIN VDE 0816

Application:

Suitable for telecommunication and data networks installed underground, in ducts or installation tubes.

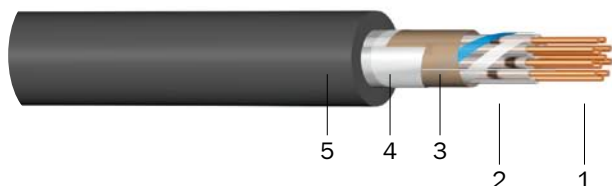

Construction:

- 1 Copper conductor, single wire
- 2 Insulation (PE), cores stranded to quads, quads stranded in groups, longitudinal watertight due to petrojelly filling
- 3 Taping (plastic tape)
- 4 Screen (copolymer coated Al-tape, bonded to the PE-sheath)
- 5 Sheath (PE black, UV-resistant)



Operating voltage: max. 225 Vss



Test voltage: A/A 500 Veff
A/S 2000 Veff



Temperature range:
 During installation: min. -20 °C
 Operating temperature: fixed -20 °C to +70 °C
 moved -20 °C to +50 °C



Bending radius (min.): 10 x Ø of the cable



Core identification: Colour code, black ring marking (DIN VDE)



Certification mark: VDE Germany

Electrical data

	(mm)	0.6	0.8
Nominal cross section	(mm)	0.6	0.8
Loop resistance max.	(Ω/km)	130	73.2
Insulation resistance, min.	(MΩ.km)	1,500	1,500
Mutual capacitance max. at 800 Hz	(nF/km)	52	55
Capacitance imbalance K_1 , max. at 800 Hz (98 % of the values)	(pF/300 m)	400	400
Capacitance imbalance K_1 , max. at 800 Hz (100 % of the values)	(pF/300 m)	800	800
Capacitance imbalance K_9-K_{12} , max. at 800 Hz (98 % of the values)	(pF/300 m)	100	100
Capacitance imbalance K_9-K_{12} , max. at 800 Hz (100 % of the values)	(pF/300 m)	300	300
Capacitance imbalance E_1-E_2 , max. at 800 Hz	(pF/300 m)	800	800

Number of circuits x nominal cross section (mm)	Outer diameter (mm) appr.	Cu-value (kg/km)	Total weight (kg/km) appr.	Standard lengths/packing (m)	Price (EUR/km)
A-2YF(L)2Y... St III Bd					
2 x 2 x 0.6	9.0	13	80	500 T, 1000 T	1,633.69
6 x 2 x 0.6	12.0	36	140	500 T, 1000 T	2,427.58
10 x 2 x 0.6	13.5	59	190	500 T, 1000 T	3,726.17
20 x 2 x 0.6	16.5	115	310	500 T, 1000 T	4,569.34
30 x 2 x 0.6	19.5	172	430	500 T, 1000 T	5,762.10
40 x 2 x 0.6	21.5	228	545	500 T, 1000 T	6,929.98
50 x 2 x 0.6	23.5	285	660	500 T, 1000 T	9,734.23
70 x 2 x 0.6	27.0	398	895	500 T, 1000 T	10,119.86

A-2YF(L)2Y...St III Bd

Number of circuits x nominal cross section (mm)	Outer diameter (mm) appr.	Cu-value (kg/km)	Total weight (kg/km) appr.	Standard lengths/packing (m)	Price (EUR/km)
A-2YF(L)2Y... St III Bd					
100 x 2 x 0.6	31.5	568	1,225	500 T, 1000 T	13,334.39
150 x 2 x 0.6	37.0	852	1,780	500 T, 1000 T	18,454.20
200 x 2 x 0.6	42.0	1,135	2,315	500 T, 1000 T	23,739.94
2 x 2 x 0.8	10.0	22	100	500 T, 1000 T	2,053.46
6 x 2 x 0.8	13.5	62	230	500 T, 1000 T	3,608.09
10 x 2 x 0.8	15.5	103	330	500 T, 1000 T	4,011.94
20 x 2 x 0.8	22.0	203	560	500 T, 1000 T	6,037.34
30 x 2 x 0.8	25.0	304	740	500 T, 1000 T	7,808.66
40 x 2 x 0.8	27.0	404	900	500 T, 1000 T	9,403.58
50 x 2 x 0.8	30.0	505	1,100	500 T, 1000 T	11,157.15
70 x 2 x 0.8	33.0	706	1,420	500 T, 1000 T	14,177.60
100 x 2 x 0.8	41.0	1,008	2,000	500 T, 1000 T	18,736.60
150 x 2 x 0.8	47.0	1,512	2,935	500 T, 1000 T	26,090.00
200 x 2 x 0.8	53.0	2,015	3,825	500 T, 1000 T	34,113.76

Subject to technical changes. All figures are therefore without guarantee.